

KELVA Web Tension Control

LV9



Improved Quality

- Kelva's LV9 - The easy way to keep the web tension constant


- Fully air operated
- Explosion proof
- Choose between spring or cylinder arm
- Available for rolls with up to Ø 1600mm
- Reliable, inexpensive and simple to install

Kelva LV9 consists of a pneumatic regulating valve with a cylinder arm or spring arm. The device is fitted to a round bar, with its roller against the reel of material. It registers reduction in the diameter of the reel and regulates the air pressure to a Kelva brake accordingly so that web tension is held constant.




WWW.KELVA.SE

| | |
|--------------|---|
| Product name | Kelva Web tension control (LV9) |
| Options | Cylinder or spring arm |
| Application | The LV9 can be used for most materials, provided the diameter of the reel does not exceed 1600mm. |
| Additional | Hand lever valve complete with air regulator and pressure gauge for cylinder arm configuration. |

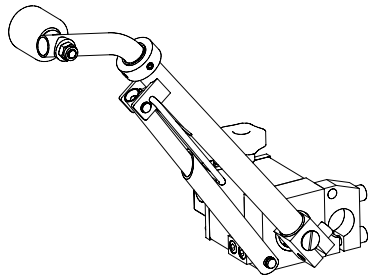

LV9 with spring arm

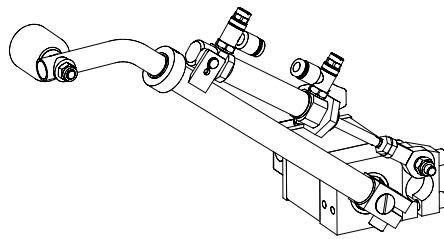

LV9 with cylinder arm

DIMENSIONS

